



# SERVICE HUB - Type 5

Hub type and configuration	C1 detail	C2 detail	C3 detail	Power input and circuit quantity
5A	Four (4) duplex blanks	One (1) 208v NEMA L6-20 receptacle	Four (4) duplex blanks	One (1) NEMA L6-20 input power cord
5B	Four (4) 120v 20A duplexes on one (1) circuit	One (1) 208v NEMA L6-20 receptacle	Four (4) 120v 20A duplexes on one (1) circuit	One (1) NEMA L6-20 and two (2) NEMA L5-20 input power cords; hub is wired for three (3) circuits
<b>5C</b> <small>EXAMPLE SHOWN</small>	Four (4) 120v 20A duplexes on two (2) circuits	One (1) 208v NEMA L6-20 receptacle	Four (4) 120v 20A duplexes on two (2) circuits	One (1) NEMA L6-20 and two (2) NEMA L14-20 input power cords; hub is wired for five (5) circuits
5D	Four (4) 120v 20A duplexes on one (1) circuit	One (1) 208v NEMA L6-20 receptacle	Two (2) 120v 20A duplexes on one (1) circuit + two (2) blanks	One (1) NEMA L6-20 and two (2) NEMA L5-20 input power cords; hub is wired for three (3) circuits

CHANNEL 1 (C1)    CHANNEL 2 (C2)    CHANNEL 3 (C3)

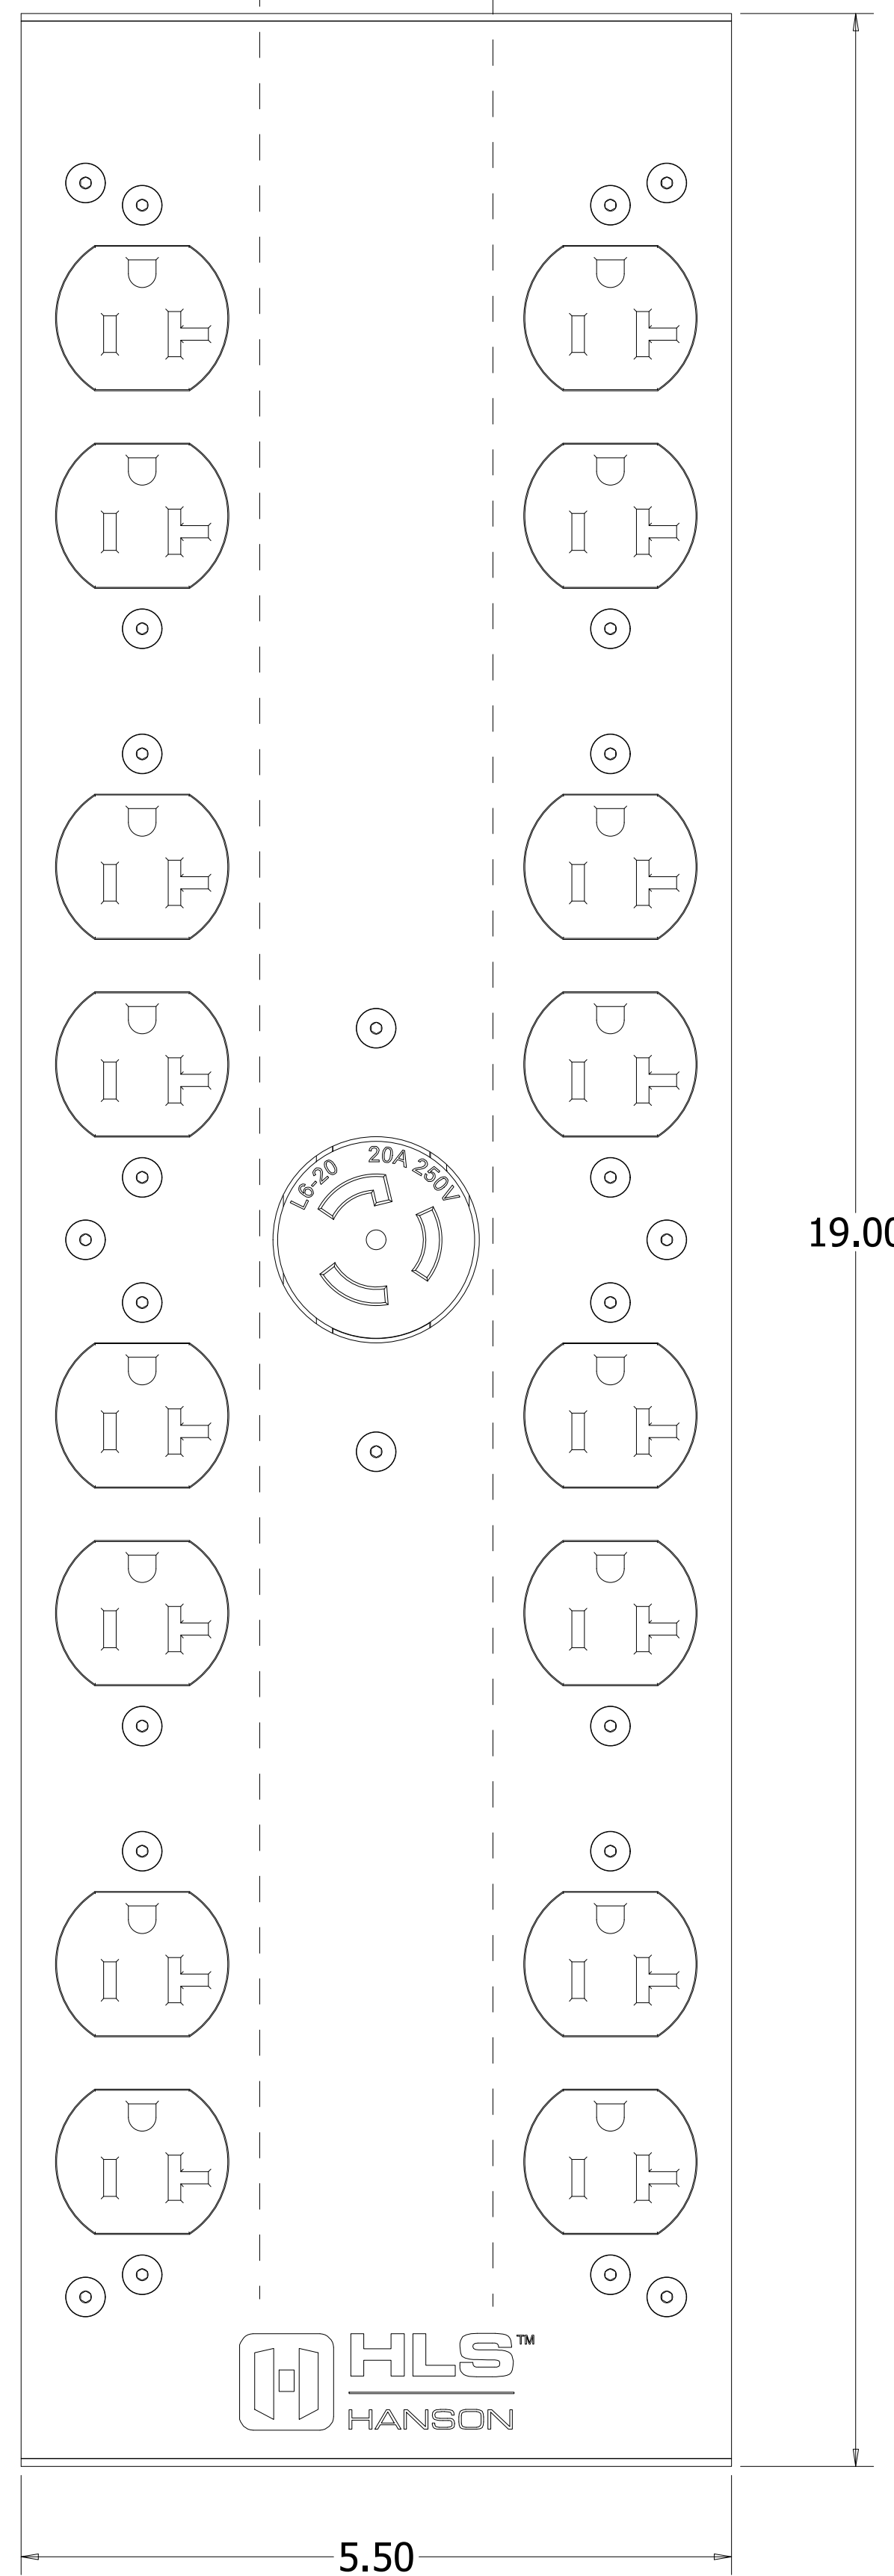

Example type 5C configured as shown, p/n SH-5CWRW3C

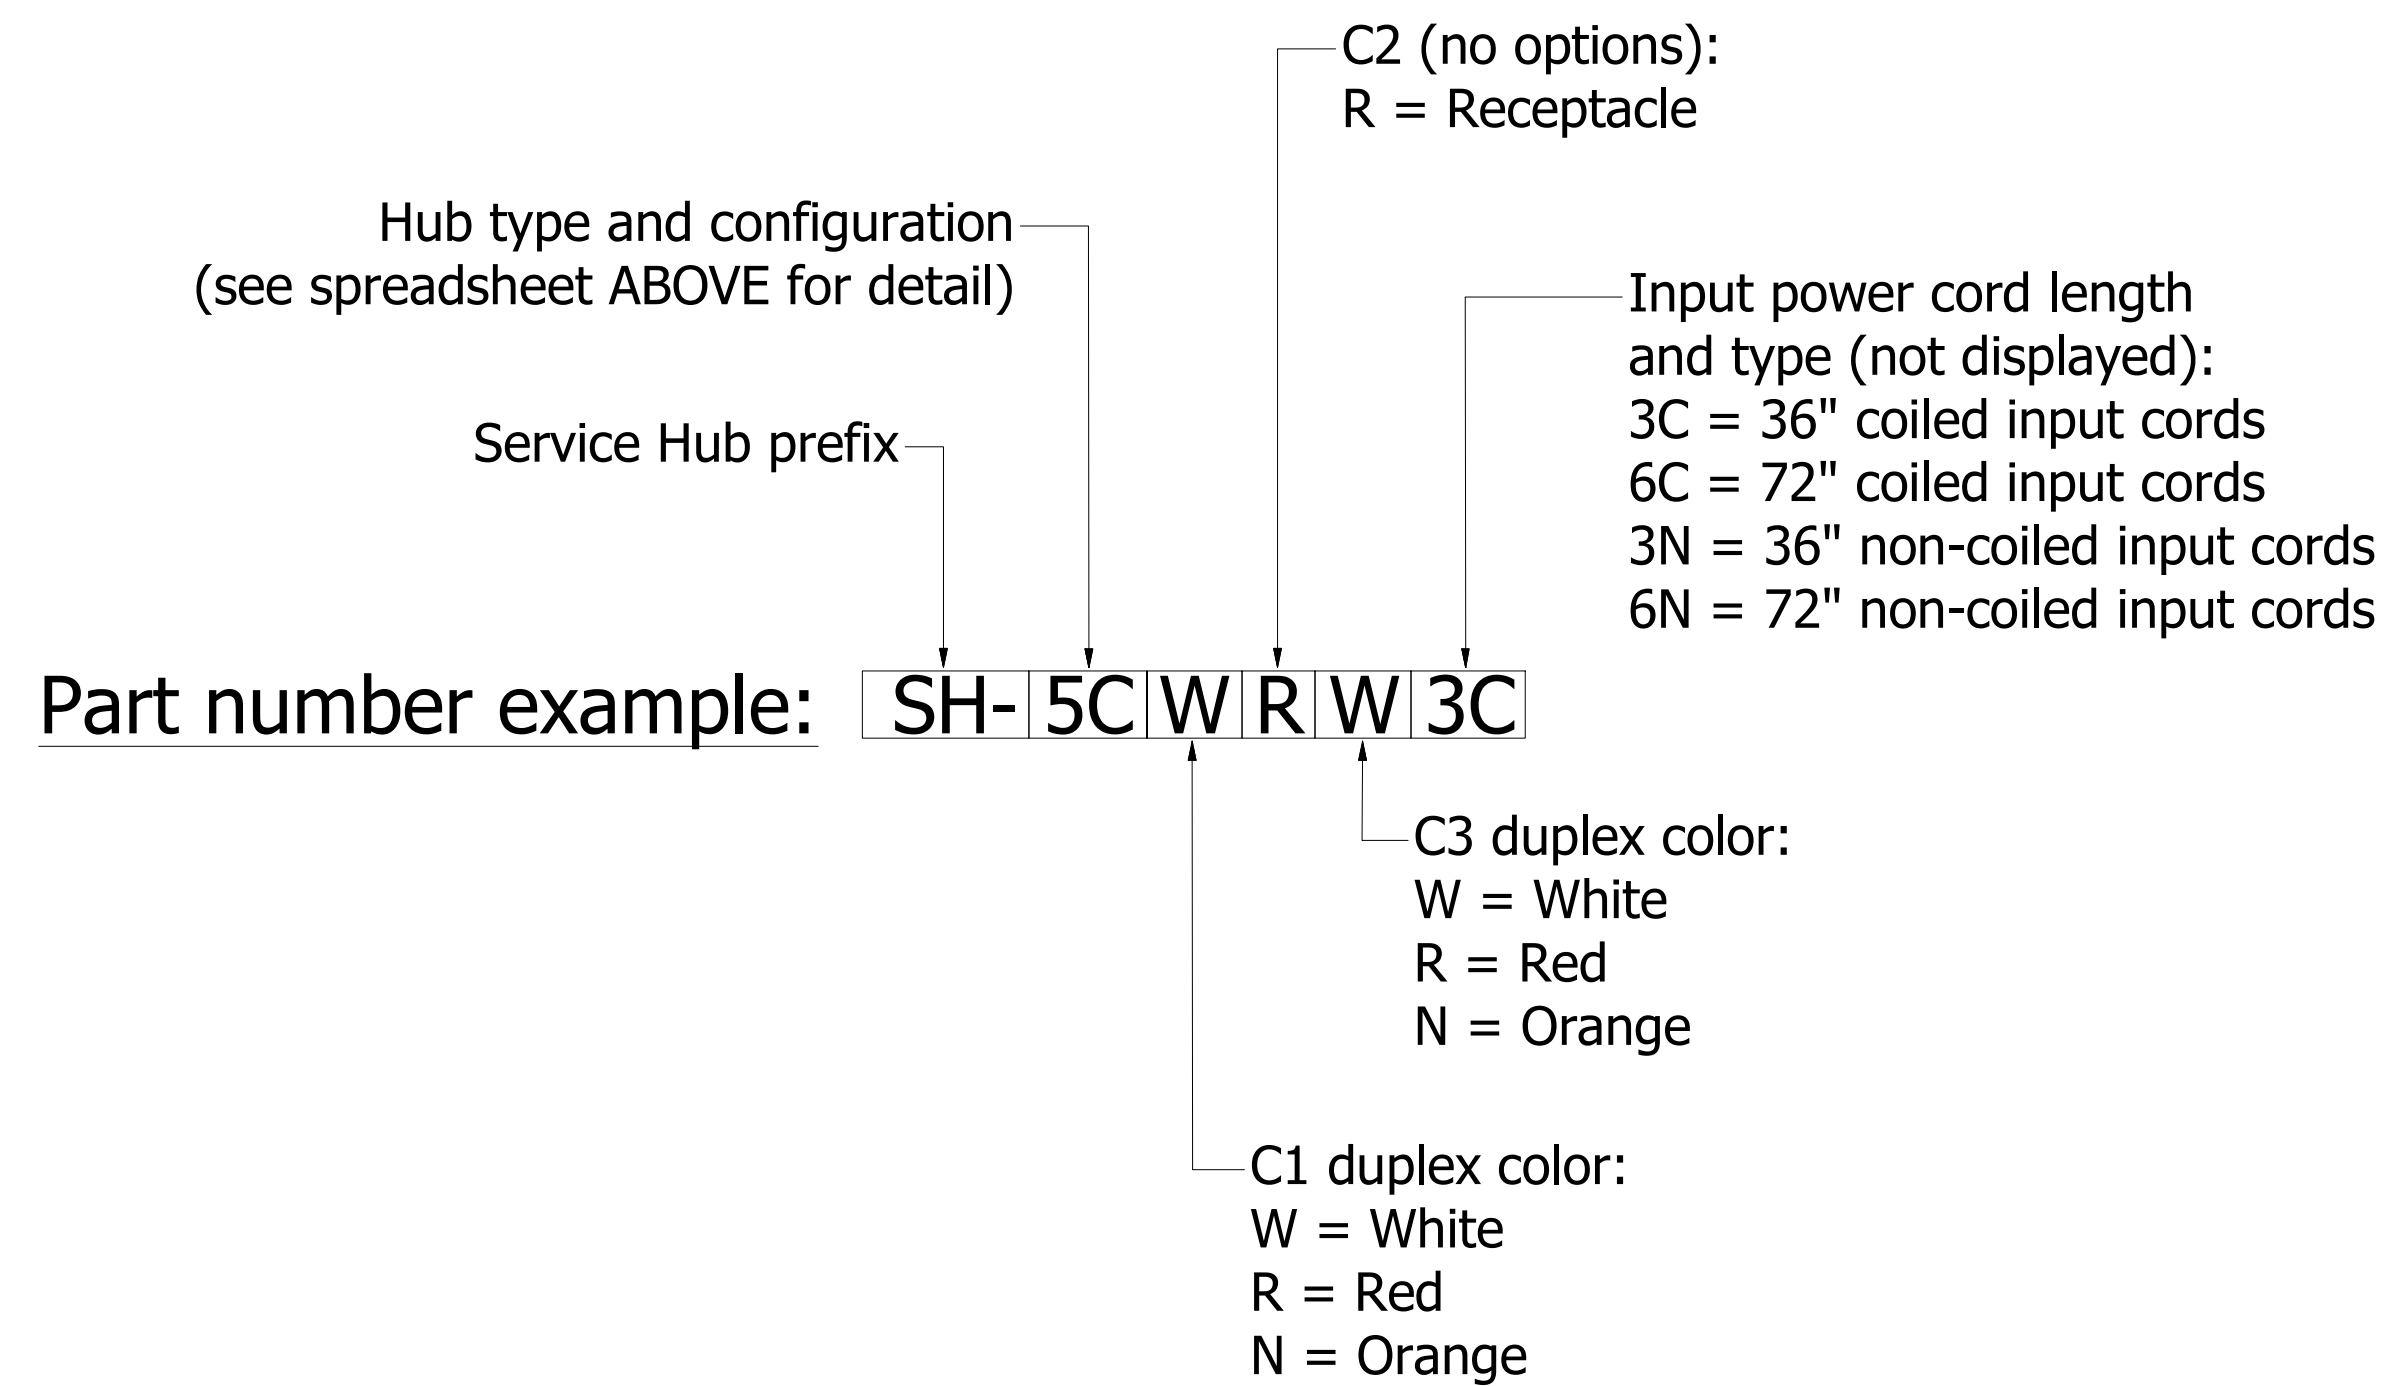

DRAWN	MWR	3/30/2018	HANSON LAB SOLUTIONS		
CHECKED			TITLE		
QA			SERVICE HUB ASSEMBLY, TYPE 5		
MFG			SIZE	DWG NO	REV
APPROVED			D	SH assy, type 5	B
			SCALE	.9	SHEET 1 OF 1