

Concentrated 120v electrical with lab gas and data

Hub type and configuration	C1 detail	C2 detail	C3 detail	Power input and circuit quantity
3A	Four (4) 120v 20A duplexes on one (1) circuit	One (1) 90° mount service valve turret + one (1) blanks + RJ45 CAT 6 ethernet jack	Four (4) 120v 20A duplexes on one (1) circuit	Two (2) NEMA L5-20 input power cords; hub is wired for two (2) circuits
EXAMPLE SHOWN 3B	Four (4) 120v 20A duplexes on two (2) circuits	Two (2) 90° mount service valve turrets + RJ45 CAT 6 ethernet jack	Four (4) 120v 20A duplexes on two (2) circuits	Two (2) NEMA L14-20 input power cords; hub is wired for four (4) circuits
3C	Four (4) 120v 20A duplexes on one (1) circuit	Two (2) 90° mount service valve turrets + RJ45 CAT 6 ethernet jack	Two (2) 120v 20A duplexes on one (1) circuit + two (2) blanks	Two (2) NEMA L5-20 input power cords; hub is wired for two (2) circuits



Hub type and configuration
(See spreadsheet ABOVE for detail)

Service Hub prefix

Valve Type:
S = Single
D = Dual (180° opposed)

C2 RJ45 jack quantity:
00 = none (blank)
02 = One set of two
03 = One set of three

Input power cord length and type (not displayed)
3C = 36" coiled input cords
6C = 72" coiled input cords
3N = 36" non-coiled input cords
6N = 72" non-coiled input cords

Part number example:

SH- 3B W S 02 W 3C


C1 duplex color:
W = White
R = Red
N = Orange

C3 duplex color:
W = White
R = Red
N = Orange

BUILD YOURS:

SH-



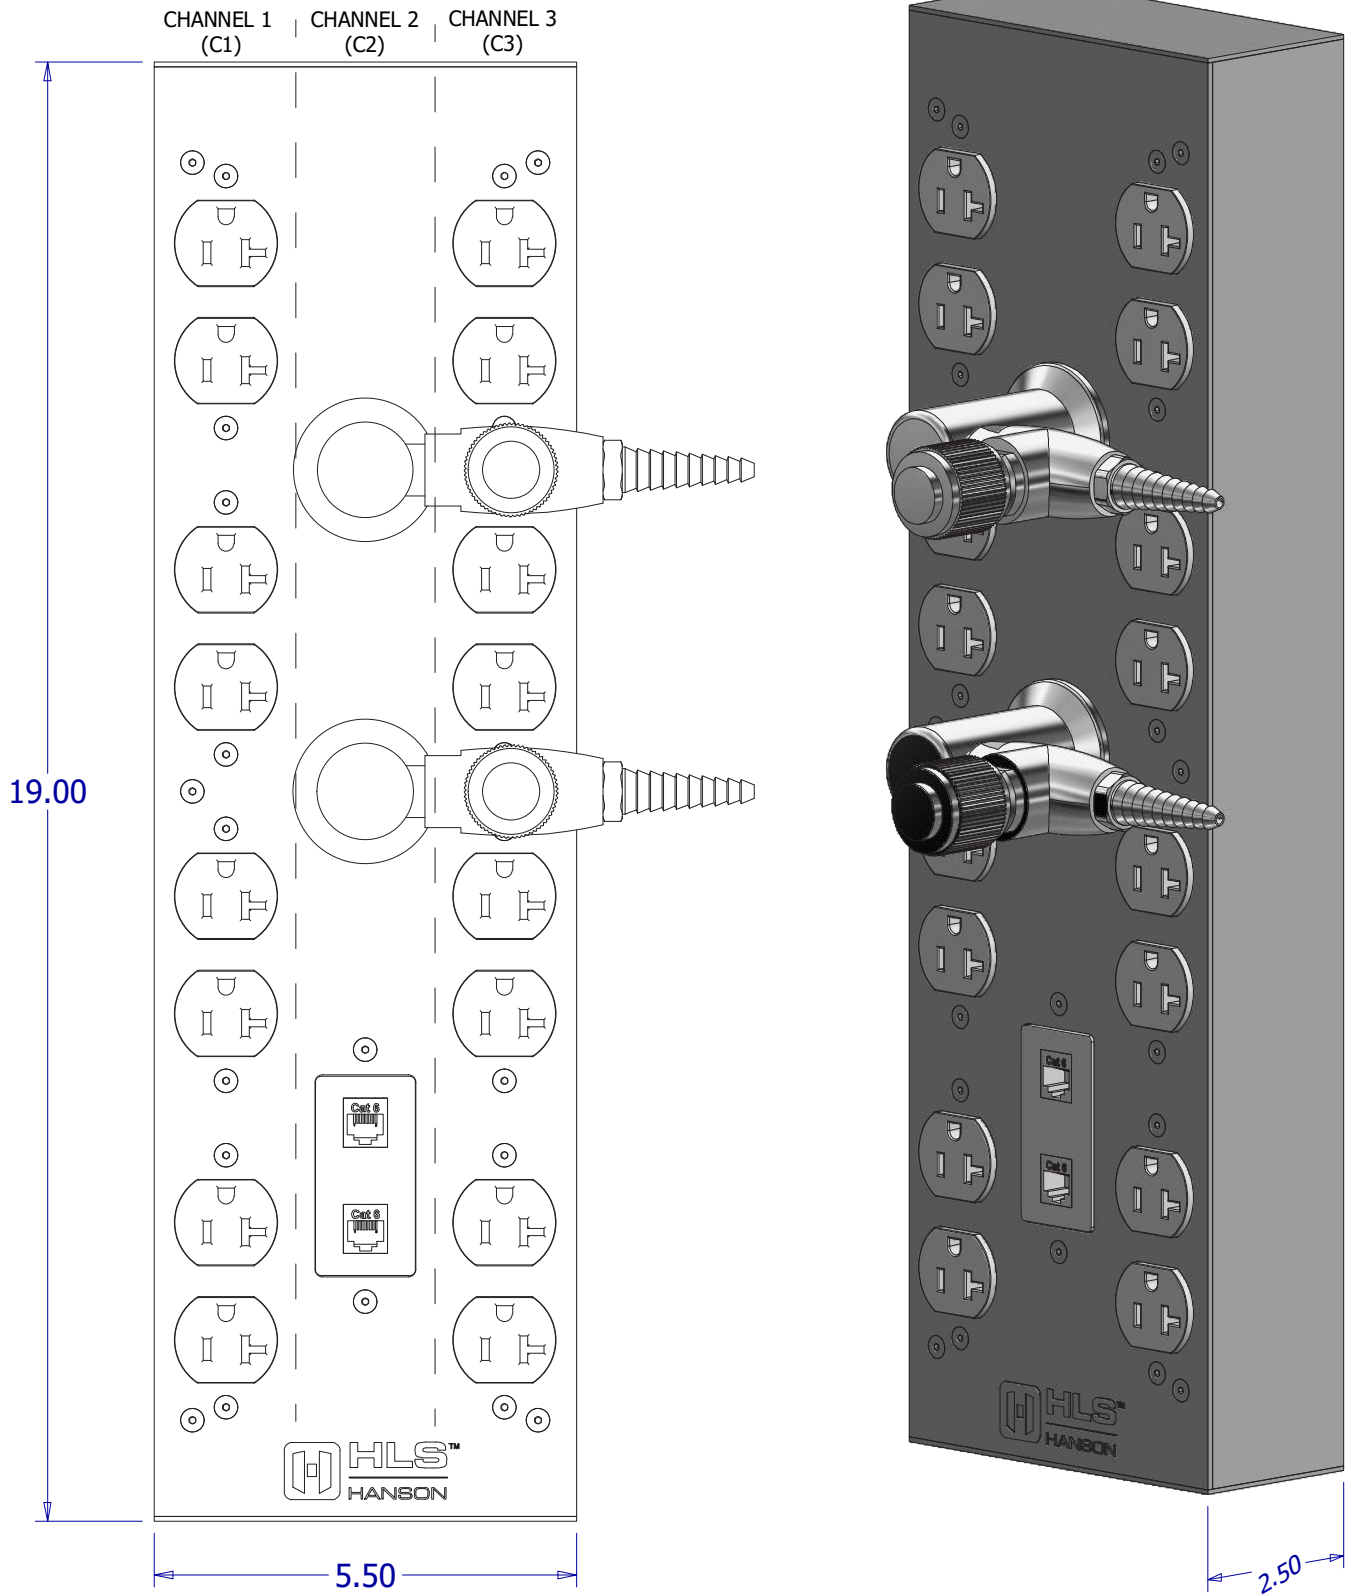

Example type 3B configured
 as shown, p/n SH-3BWS02W3C