

Concentrated 120v electrical with 208/220v service

Hub type and configuration	C1 detail	C2 detail	C3 detail	Power input and circuit quantity
5A	Four (4) duplex blanks	One (1) 208v NEMA L6-20 receptacle	Four (4) duplex blanks	One (1) NEMA L6-20 input power cord
5B	Four (4) 120v 20A duplexes on one (1) circuit	One (1) 208v NEMA L6-20 receptacle	Four (4) 120v 20A duplexes on one (1) circuit	One (1) NEMA L6-20 and two (2) NEMA L5-20 input power cords; hub is wired for three (3) circuits
EXAMPLE SHOWN 5C	Four (4) 120v 20A duplexes on two (2) circuits	One (1) 208v NEMA L6-20 receptacle	Four (4) 120v 20A duplexes on two (2) circuits	One (1) NEMA L6-20 and two (2) NEMA L14-20 input power cords; hub is wired for five (5) circuits
5D	Four (4) 120v 20A duplexes on one (1) circuit	One (1) 208v NEMA L6-20 receptacle	Two (2) 120v 20A duplexes on one (1) circuit + two (2) blanks	One (1) NEMA L6-20 and two (2) NEMA L5-20 input power cords; hub is wired for three (3) circuits



Hub type and configuration
(See spreadsheet ABOVE for detail)

C2 (no options):
R = Receptacle

Service Hub prefix

Input power cord length and type (not displayed)
3C = 36" coiled input cords
6C = 72" coiled input cords
3N = 36" non-coiled input cords
6N = 72" non-coiled input cords

Part number example:

SH- 5C W R W 3C


C1 duplex color:
W = White
R = Red
N = Orange

C3 duplex color:
W = White
R = Red
N = Orange

BUILD YOURS:

SH-

R

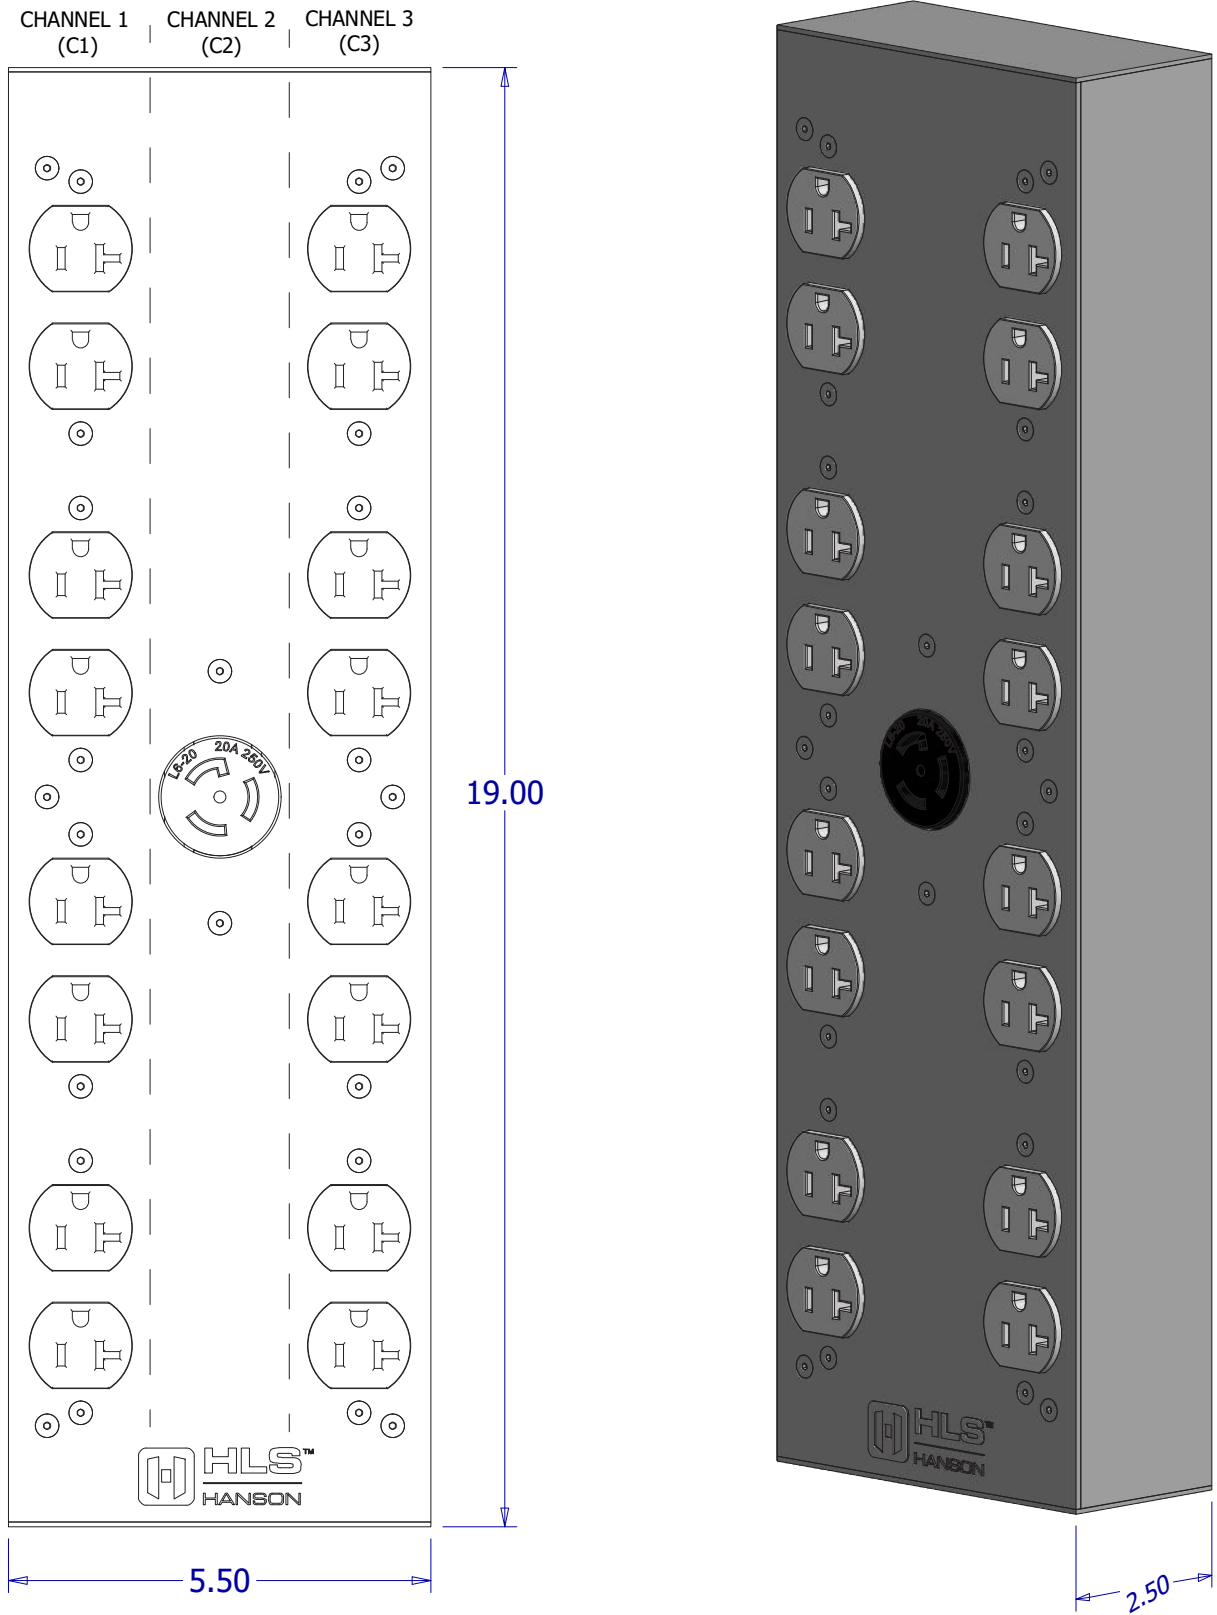

Example type 5C configured as shown, p/n SH-5CWRW3C